

ADDRESS TRANSLATION AND TLB

Mahdi Nazm Bojnordi

Assistant Professor

School of Computing


University of Utah

Overview

- Announcement
 - ▣ Homework 4 submission deadline: Nov. 6th
- This lecture
 - ▣ Virtual memory
 - ▣ Page tables and address translation
 - ▣ Translation look-aside buffer (TLB)


Recall: Memory Hierarchy

- Lower levels provide greater capacity longer time
 - ▣ Does the program fit in main memory?
 - ▣ What if running multiple programs?

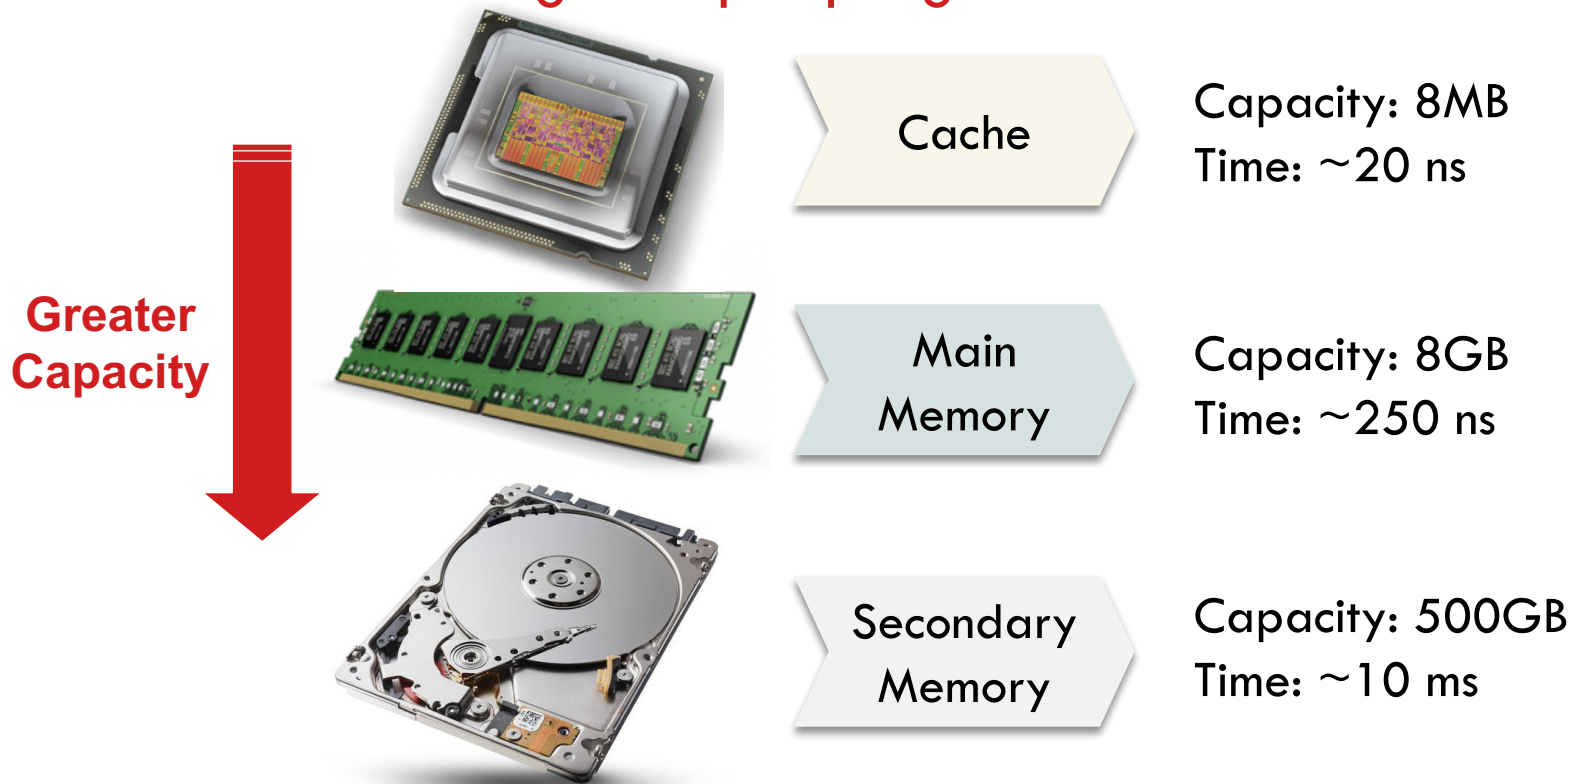


Virtual Memory

- Use the main memory as a “cache” for secondary memory
 - ▣ Placement policy?

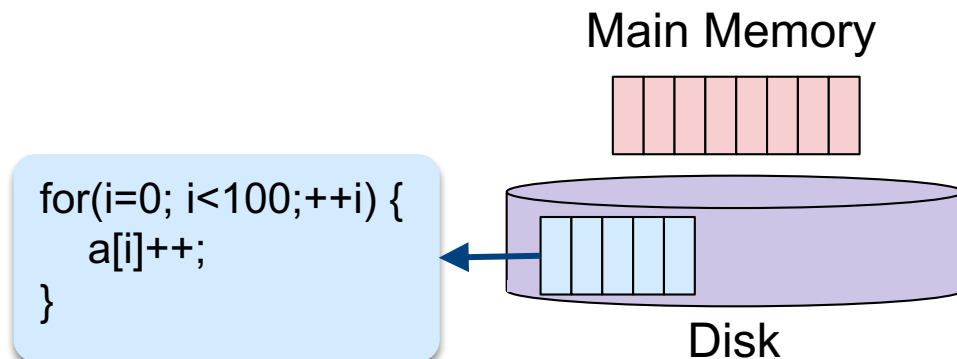


Virtual Memory

- Use the main memory as a “cache” for secondary memory
 - ▣ Placement policy?
- Allow efficient and safe **sharing** the physical main memory among multiple programs
 - ▣ Replacement policy?

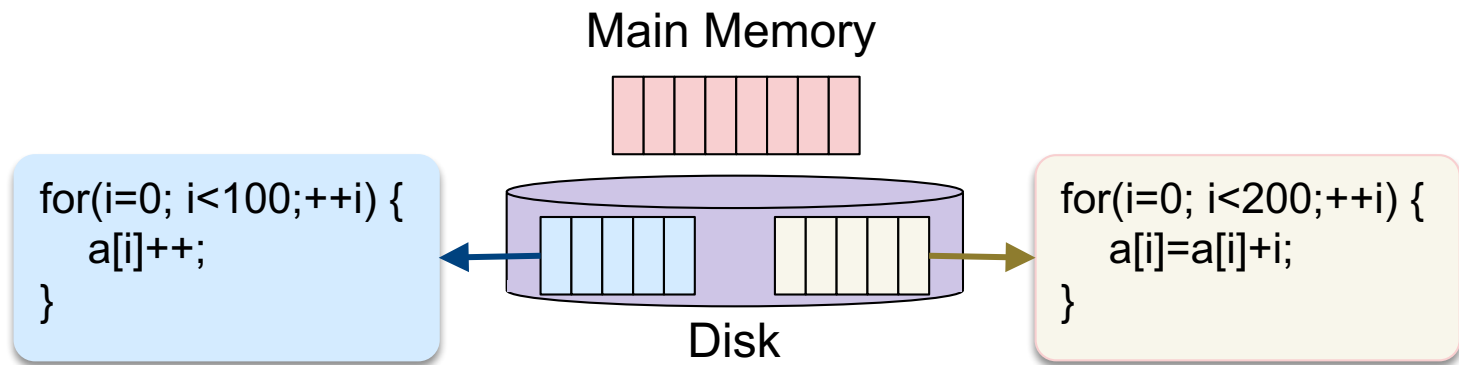


Virtual Memory Systems

- Provides illusion of very large memory
 - ▣ Address space of each program larger than the physical main memory
- Memory management unit (MMU)
 - ▣ Between main and secondary mem.
 - ▣ Address translation
 - Virtual address space used by the program
 - Physical address space is provided by the physical main memory

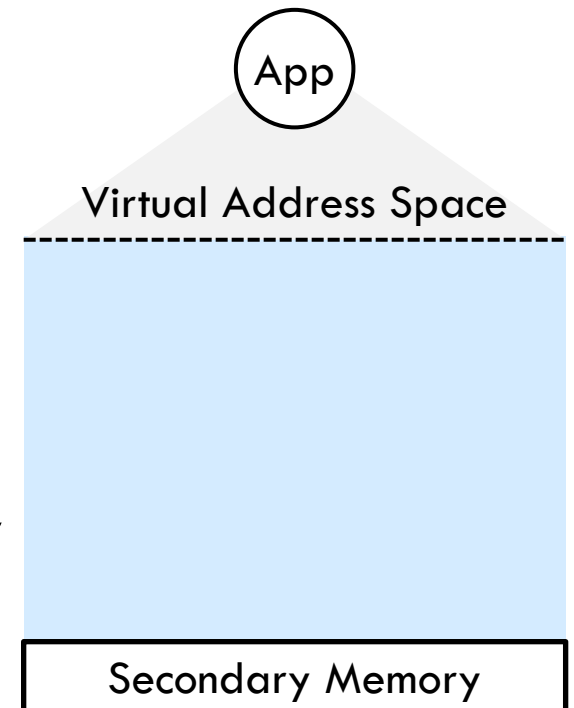



Virtual Memory Systems

- Provides illusion of very large memory
 - ▣ Address space of each program larger than the physical main memory
- Memory management unit (MMU)
 - ▣ Between main and secondary mem.
 - ▣ Address translation
 - Virtual address space used by the program
 - Physical address space is provided by the physical main memory

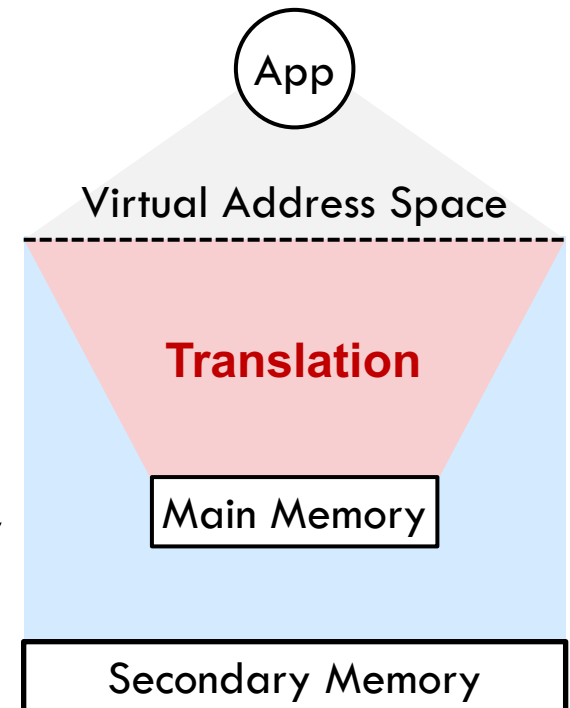


Virtual Address

- Every virtual address is translated to a physical address with the help of hardware
- Data granularity

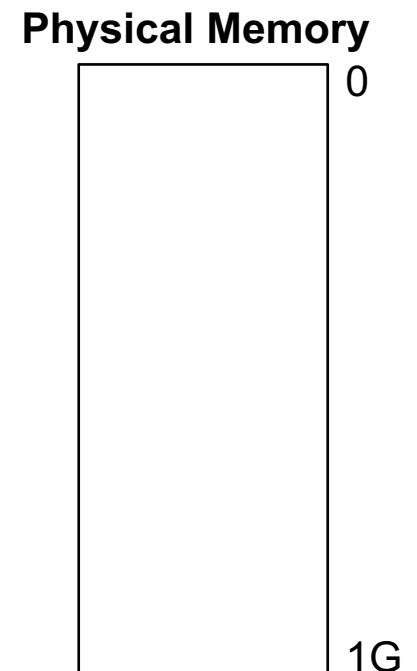


Virtual Address

- Every virtual address is translated to a physical address with the help of hardware
- Data granularity

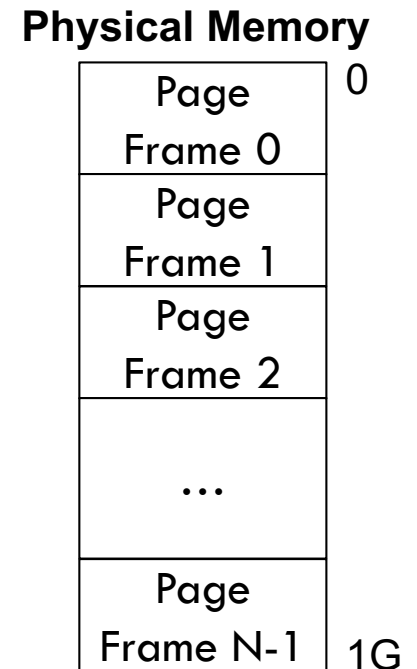


Virtual Address

- Every virtual address is translated to a physical address with the help of hardware
- Data granularity

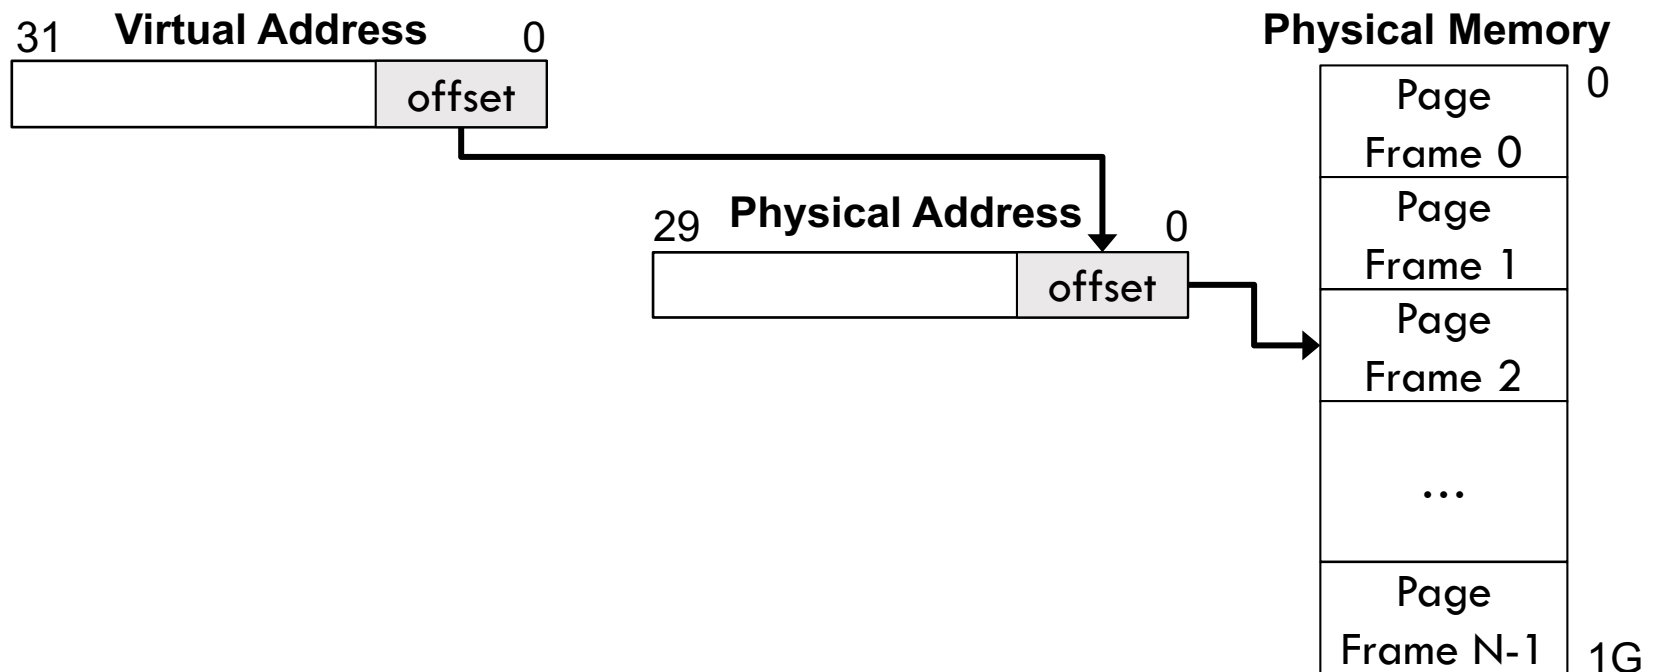


Virtual Address

- Every virtual address is translated to a physical address with the help of hardware
- Data granularity

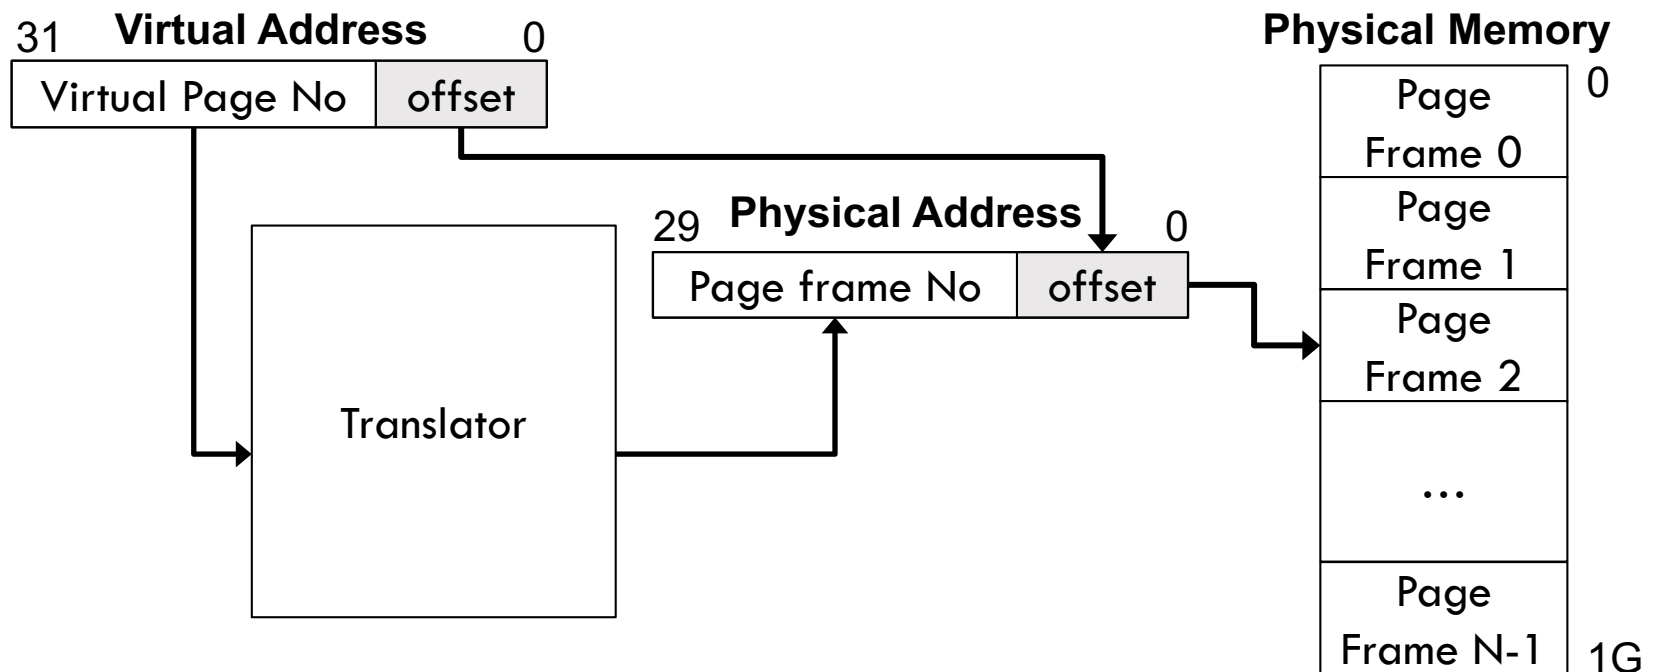

Virtual Address

- Every virtual address is translated to a physical address with the help of hardware
- Data granularity

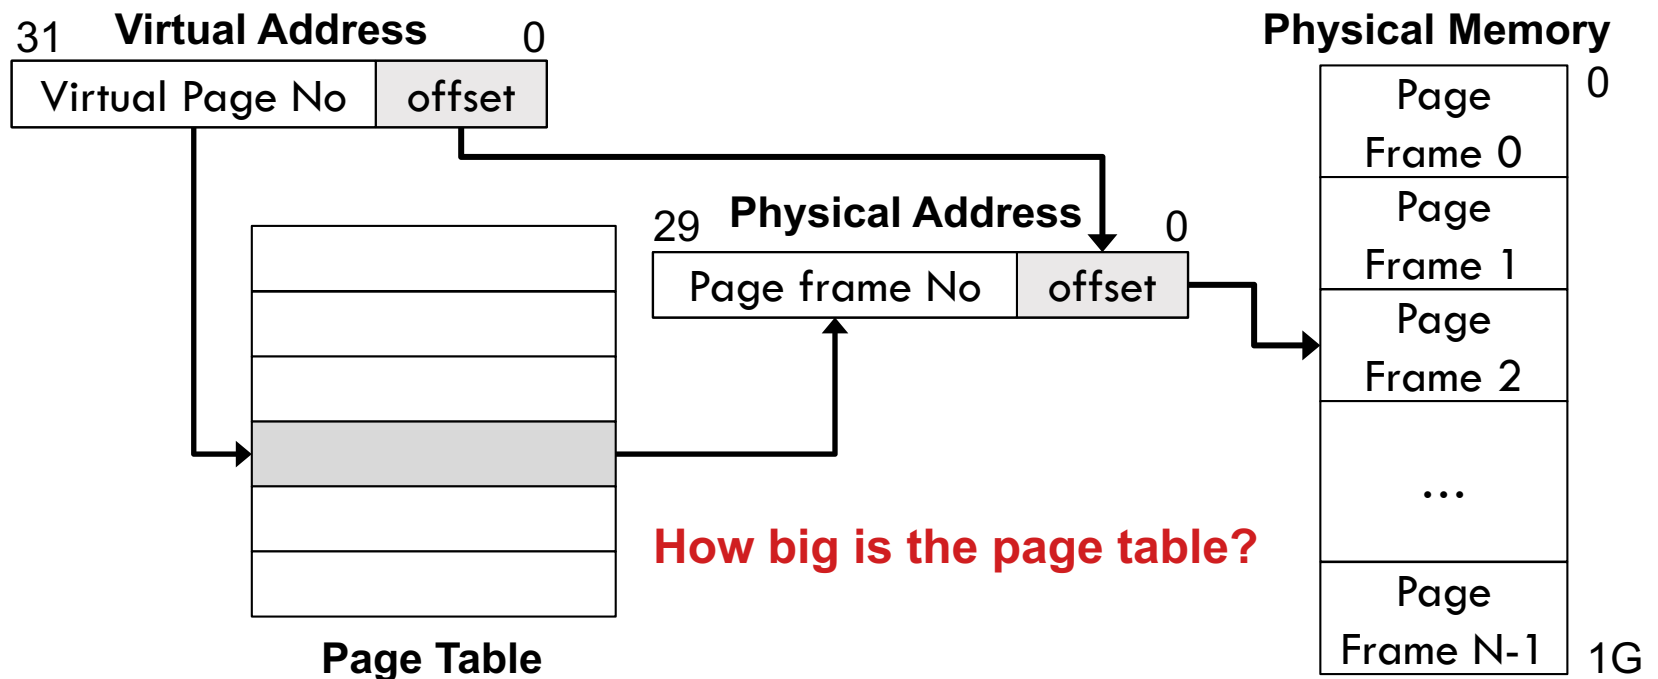

Address Translation Issues

- Where to store the table?
 - ▣ Too big for on-chip cache
 - ▣ Should be maintained in the main memory

Address Translation Issues


- Where to store the table?
 - ▣ Too big for on-chip cache
 - ▣ Should be maintained in the main memory
- What to do on a page table miss (page fault)?
 - ▣ No valid frame assigned to the virtual page
 - ▣ OS copies the page from disk to page frame

Address Translation Issues

- Where to store the table?
 - ▣ Too big for on-chip cache
 - ▣ Should be maintained in the main memory
- What to do on a page table miss (page fault)?
 - ▣ No valid frame assigned to the virtual page
 - ▣ OS copies the page from disk to page frame
- What is the cost of address translation?
 - ▣ Additional accesses to main memory per every access
 - ▣ Optimizations?


Address Translation Cost

- Page walk: look up the physical address in the page table
 - ▣ How many pages for storing the page table?

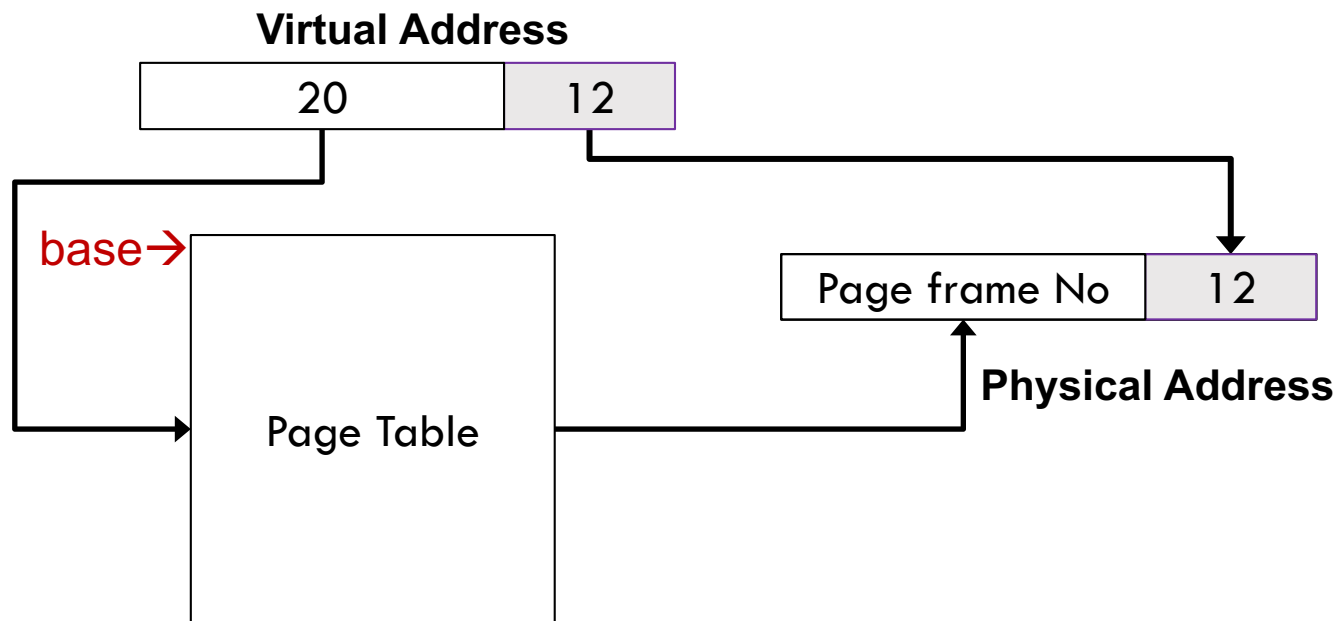


Multi-Level Page Table

- The virtual (logical) address space is broken down into multiple pages
 - ▣ Example: 4KB pages

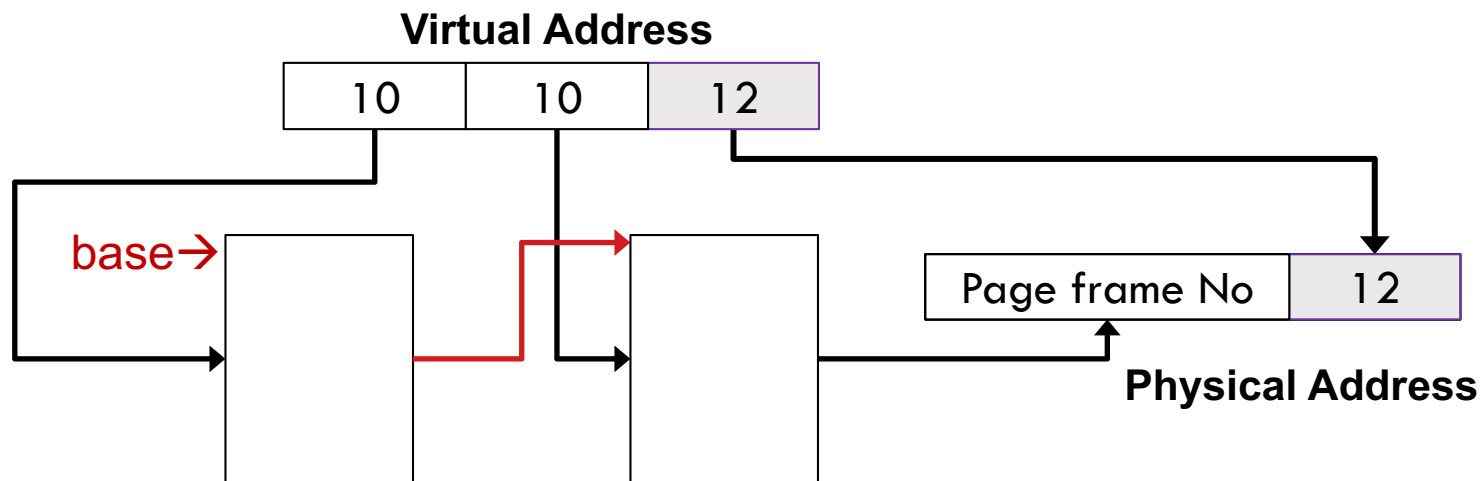


Translation Lookaside Buffer

- Exploit locality to reduce address translation time
 - ▣ Keep the translation in a buffer for future references

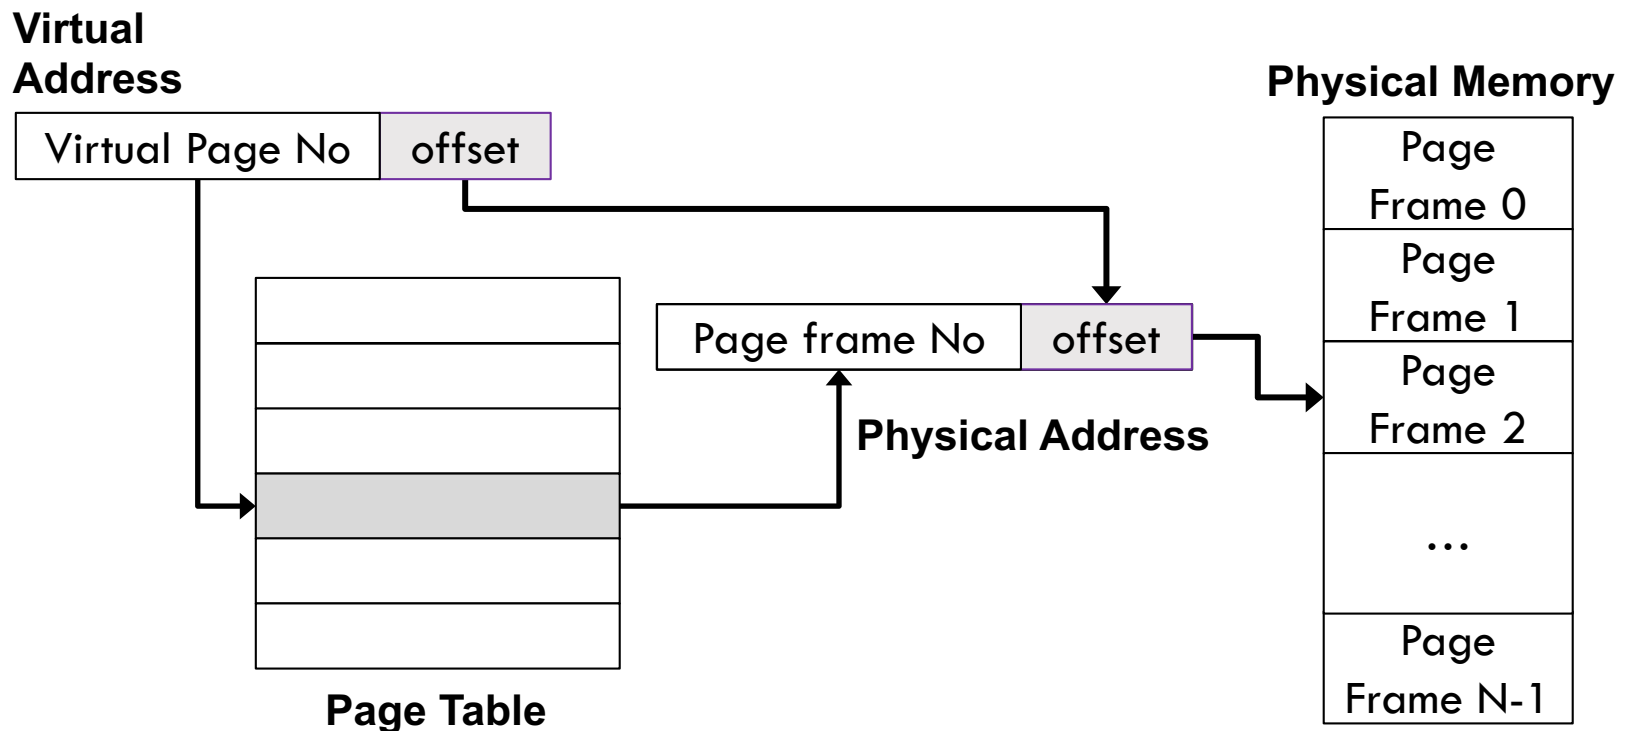

Translation Lookaside Buffer

- Exploit locality to reduce address translation time
 - ▣ Keep the translation in a buffer for future references

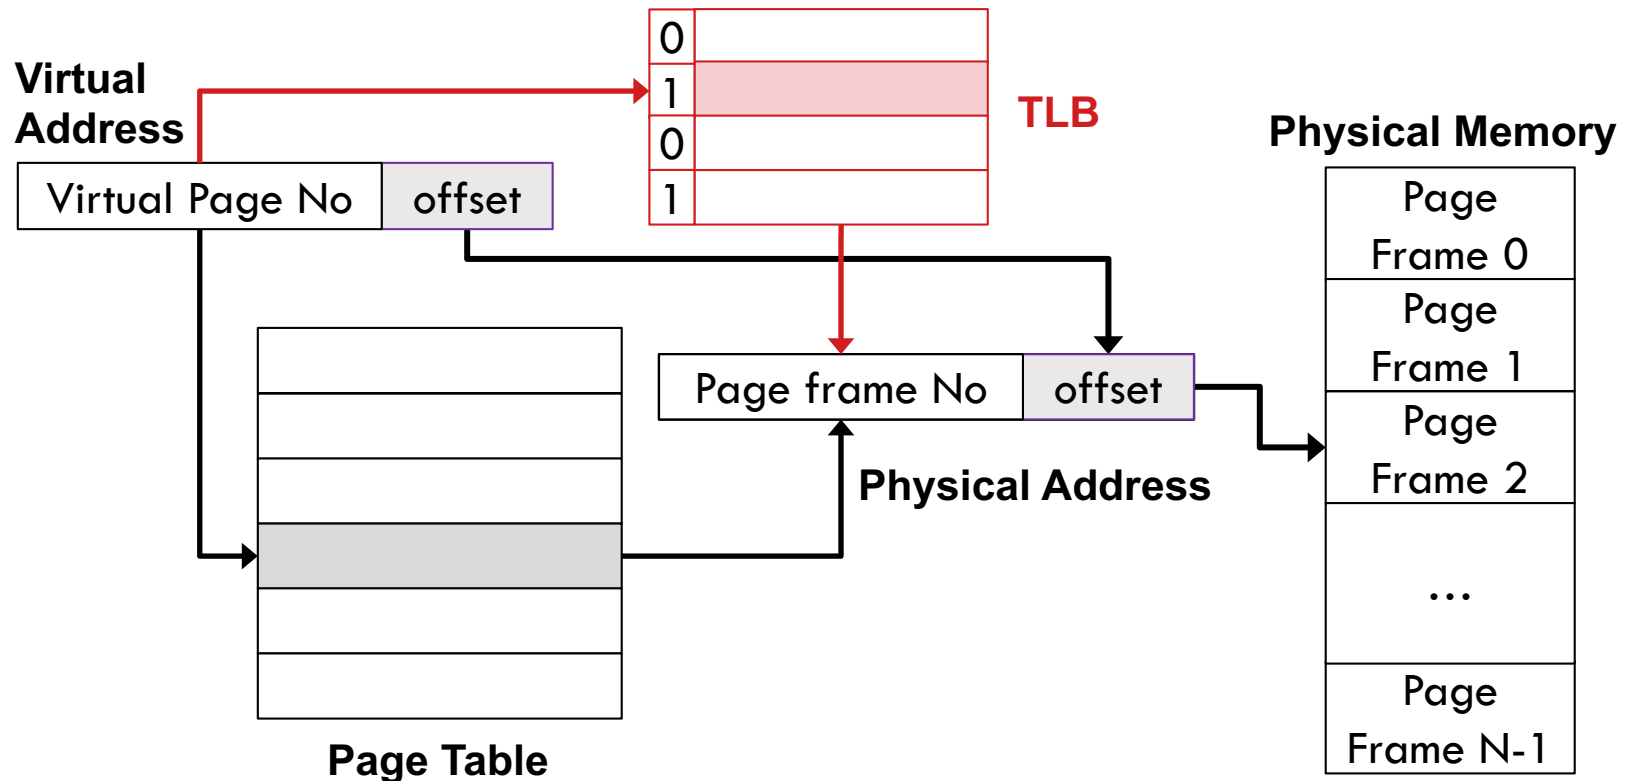

Translation Lookaside Buffer


- Just like any other cache, the TLB can be organized as fully associative, set associative, or direct mapped
- TLB access is typically faster than cache access
 - ▣ Because TLBs are much smaller than caches
 - ▣ TLBs are typically not more than 128 to 256 entries even on high-end machines

V	Virtual Page #	Physical Page #	Dirty	Status


CAM Based TLB

- Content addressable memory (CAM)
 - ▣ Unlike RAM, data in address out

RAM: Read Operation

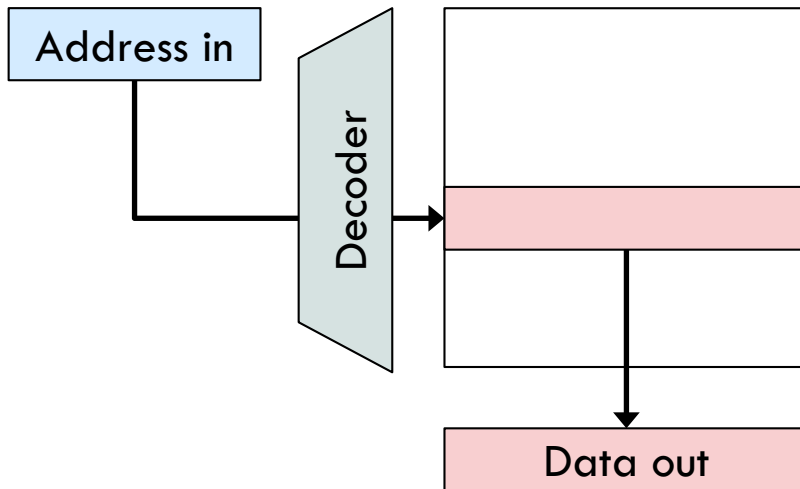

CAM: Search Operation

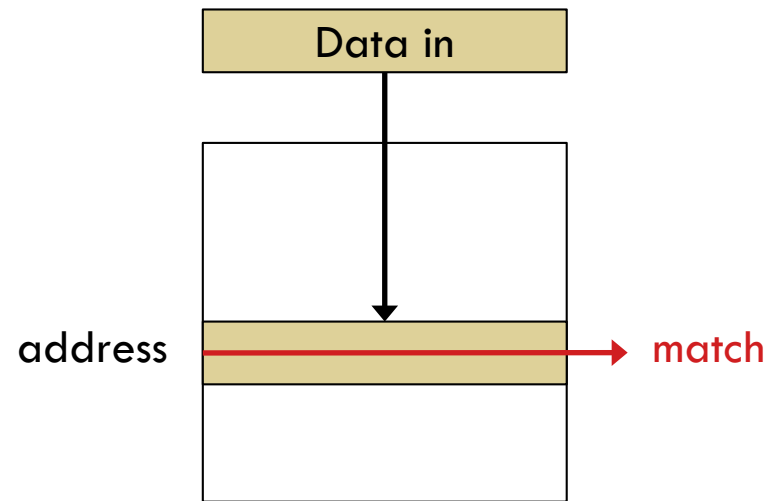

What if multiple rows match?

CAM Based TLB

- Content addressable memory (CAM)
 - ▣ Unlike RAM, data in address out
- CAM based TLB
 - ▣ Both CAM and RAM are used

